

KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates

Thank you for purchasing the KTM 690 auxiliary tank from RADE/GARAGE. The installation is straight forward, a but time consuming (up to 3 -4 hours). Ideally drain the main tank the day before.

1/ Remove the OEM side panels

a/ Remove the seat. The panels are held by pins so you must first push out in the area of my thumbs as in the picture.



b/ There are also two plastics hooks so carefully lift and slide out forward.



KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates

c/ Now take a larger flathead screwdriver and lift the ignition cover. It is held also by two pins.



d/ Remove the plastic seat support. If you wish to reuse these supports you will need to modify



KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates

e/ Remove the black side panels.



2/ Remove the OEM airbox

a/ Start with the seat locks



KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates

b/ Next remove the four bolts holding the OEM airbox. Note: on the right side the access to the front bolt is hidden under the small radiator. Therefore, you have to remove the radiator first.



c/ On the left side of the bike... loose the sleeve holding the air box flange. Note, there are two sleeves – loose the one closer to the engine! Then take again big flathead screwdriver and push the flange out of the engine suction neck and remove the air box.




Note: It will hang on two tubes... one from left and second from down right. Disconnect them.

KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates

d/ Now take out the OEM air box. Remove the temperature sensor holder and take out the original flange. You will need it for the small air box.

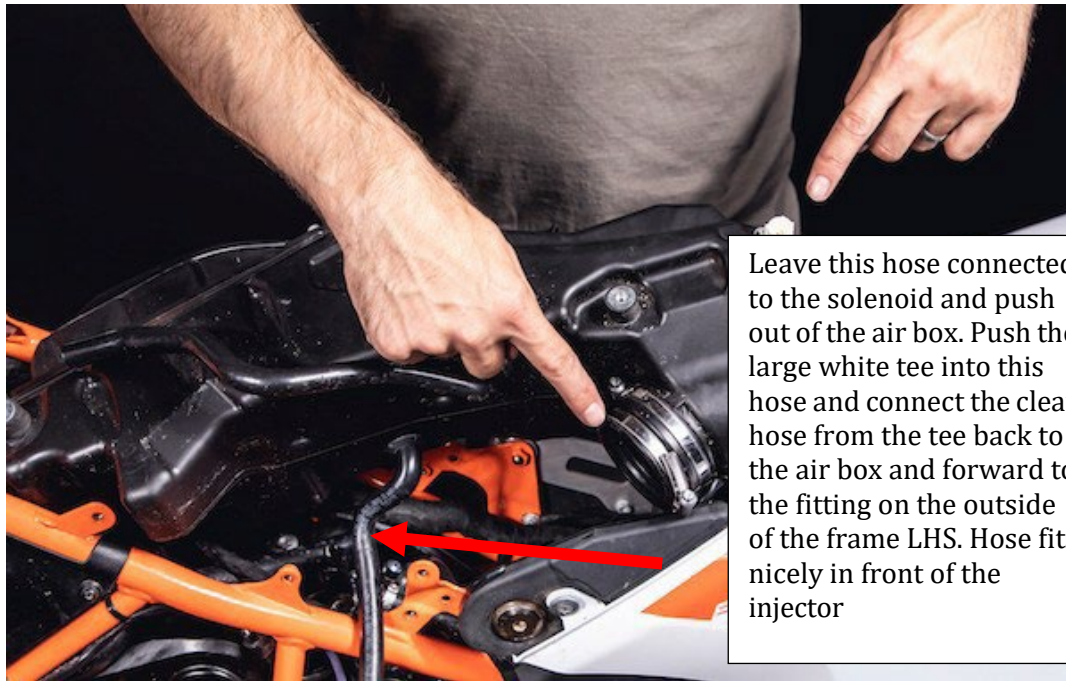

3/ Prepare the small air box

a/ Use the OEM screws to mount the temperature sensor holder to the small air box




Before you go any further read the next pages or look at video on breather hoses for tanks as this is the best time to fit these

<https://youtu.be/OJJXaaHY4BA>

KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates

Fuel Tank Breather Hoses

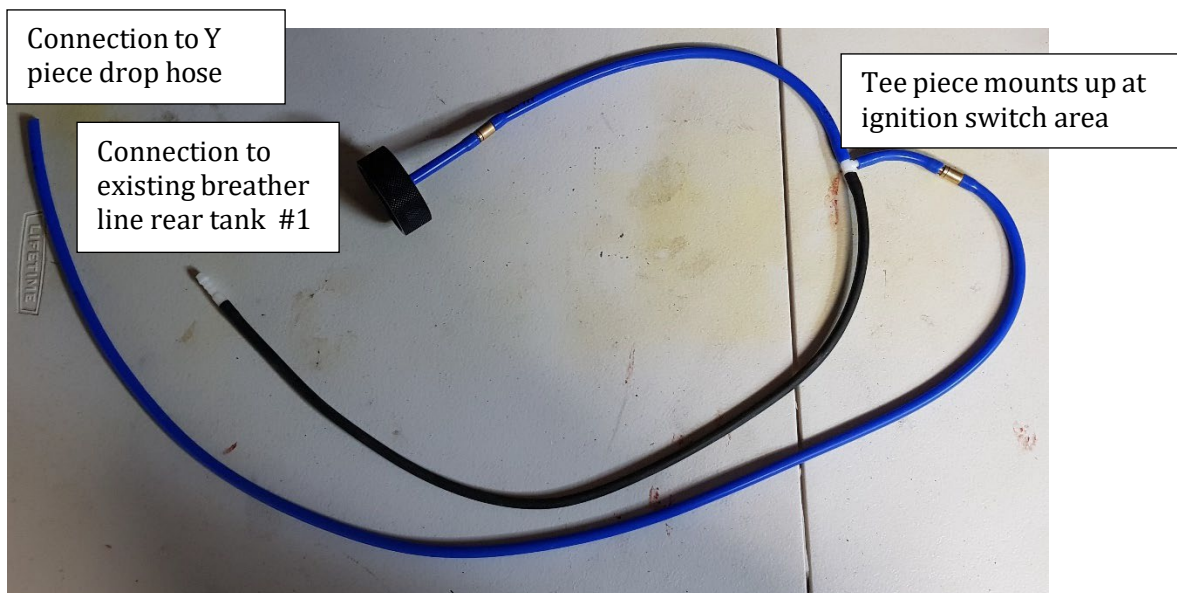



- Brass breather/spinners not used.
- Ensure hoses are not kinked or tied too tight clamping off
- Hoses can be shorten as required

Cut hose from rear tank breather too Y piece about 60-70mm from Y #3. Take connection #1 and connect to hose from rear tank you have cut off Y piece previously.

Connect hose #2 too Y piece hose that has been previously cut

KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates

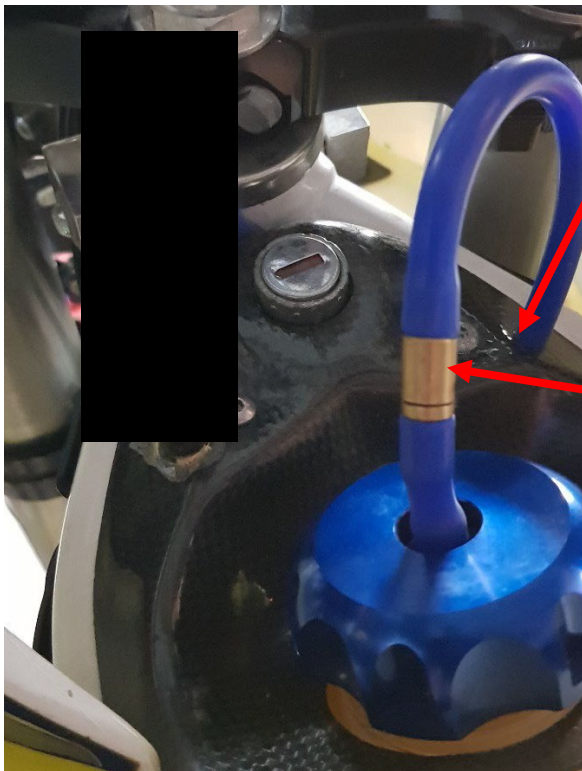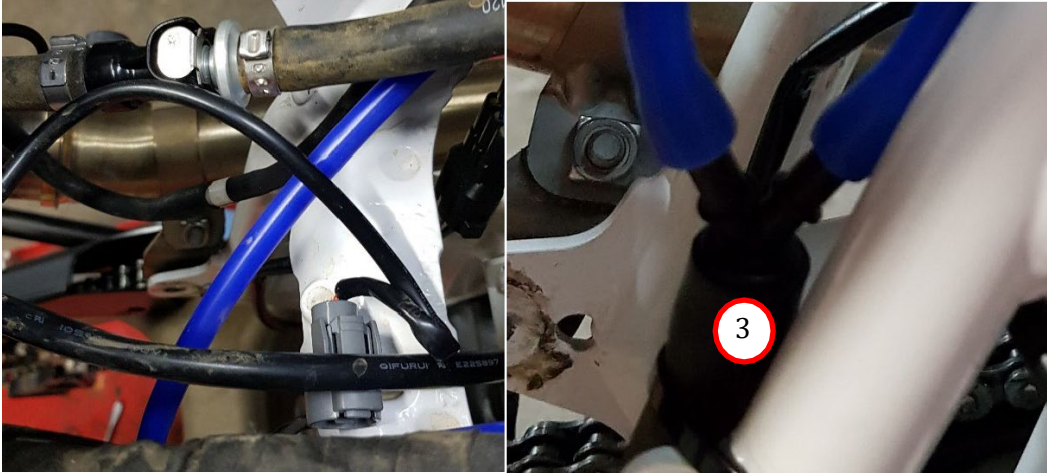

Drill 8mm holes in carbon cover or you can run hole through gap at headstock

Not used



KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates

requires drilling 1x 8mm holes into carbon cover or you can run hole through gap at headstock



This side of Y piece stays connected to charcoal canister

You Tube video for Breather hoses

<https://youtu.be/OJJXaaHY4BA>

Congratulation! The installation is finished and you can start enjoying your extended fuel range ©

Thanks again for your purchase. If you like our products, post on Facebook in your favorite group or wall and tag us!

These instructions have been modified by Adventure Bike Components to suit Australian customers. Rade Garage take no responsibility for changes to these instructions.

KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates

b/ Squeeze the original flange as in the picture and insert it into the small air box.



c/ Attach the pink vent tube and then fit the small airbox back on the engine suction neck.



Use a cable tie on these hose ends to prevent them coming off. This hose goes to the TEE


KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates

d/ Use the cage and frame to mount the foam filter (ensure it is pre-oiled). New Air box is single bolt



e/ Cut the vent tube and insert the T-connector and line one tube to the right side down to SAS.


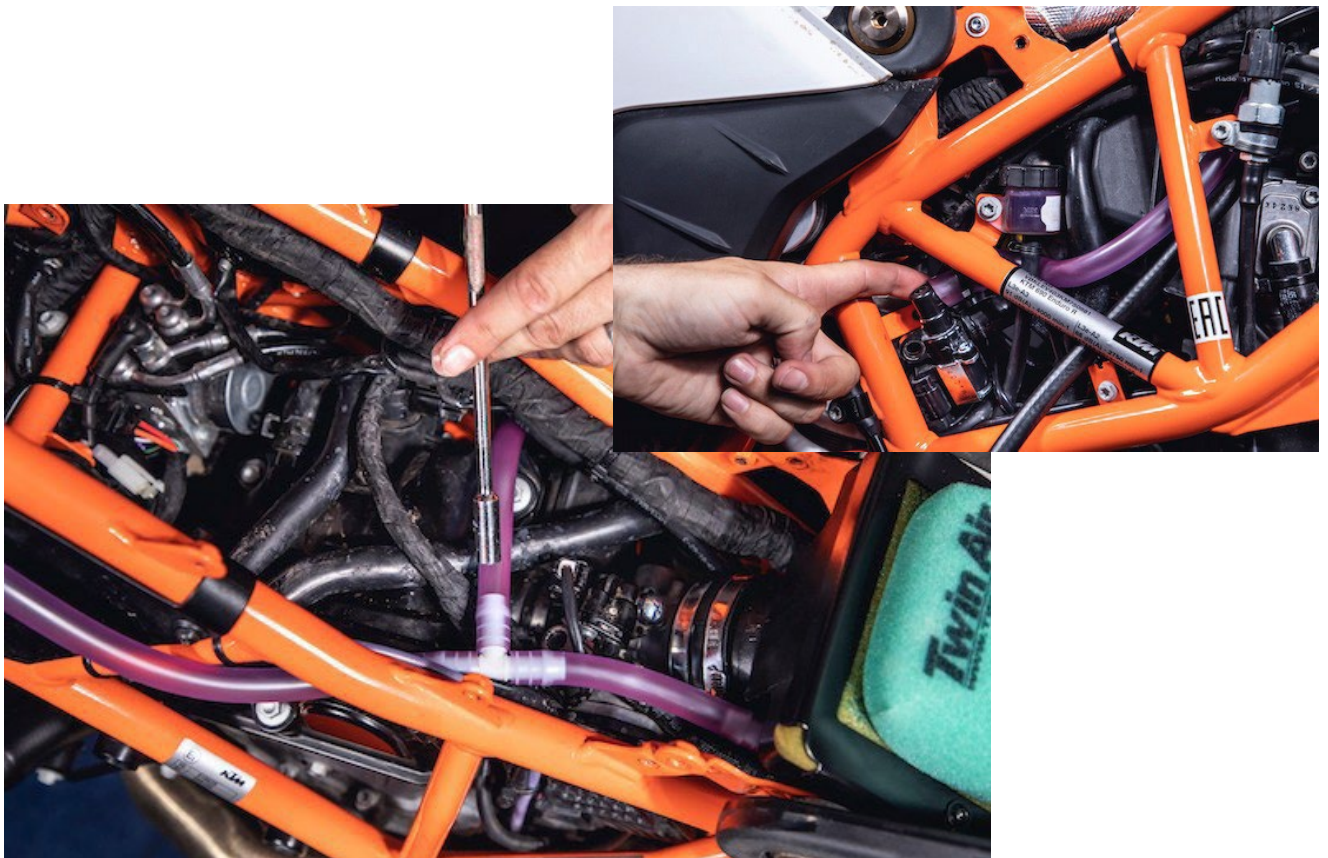


KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates

4/ Prepare and fit the tank

a/ Start with mounting the bracket. Make sure you mount it as in the picture! Two bolts and nuts hold the tank and two bolts holds it in the position.

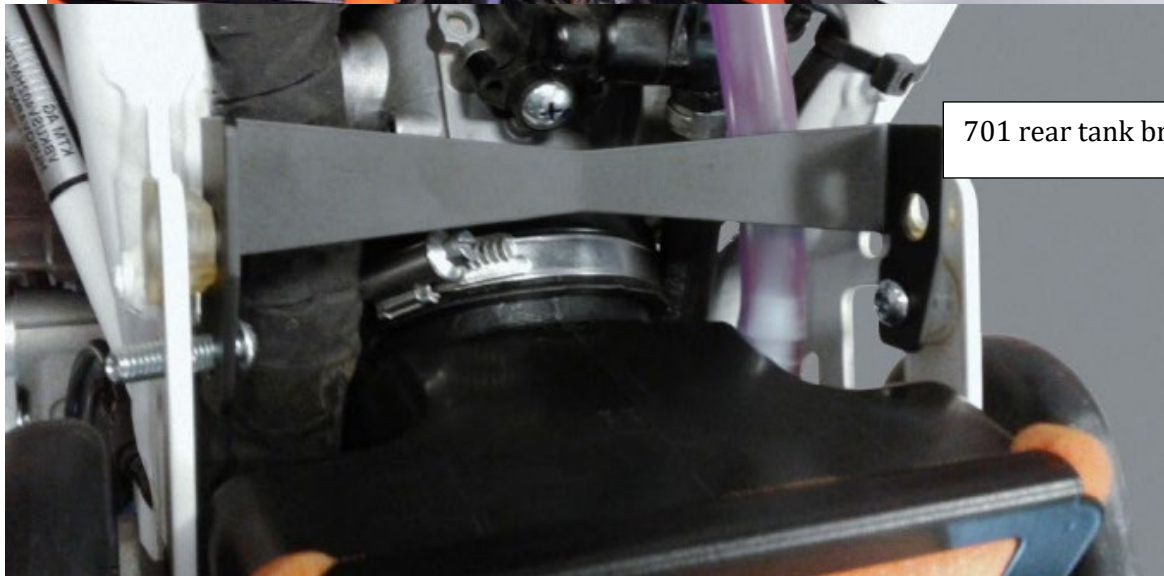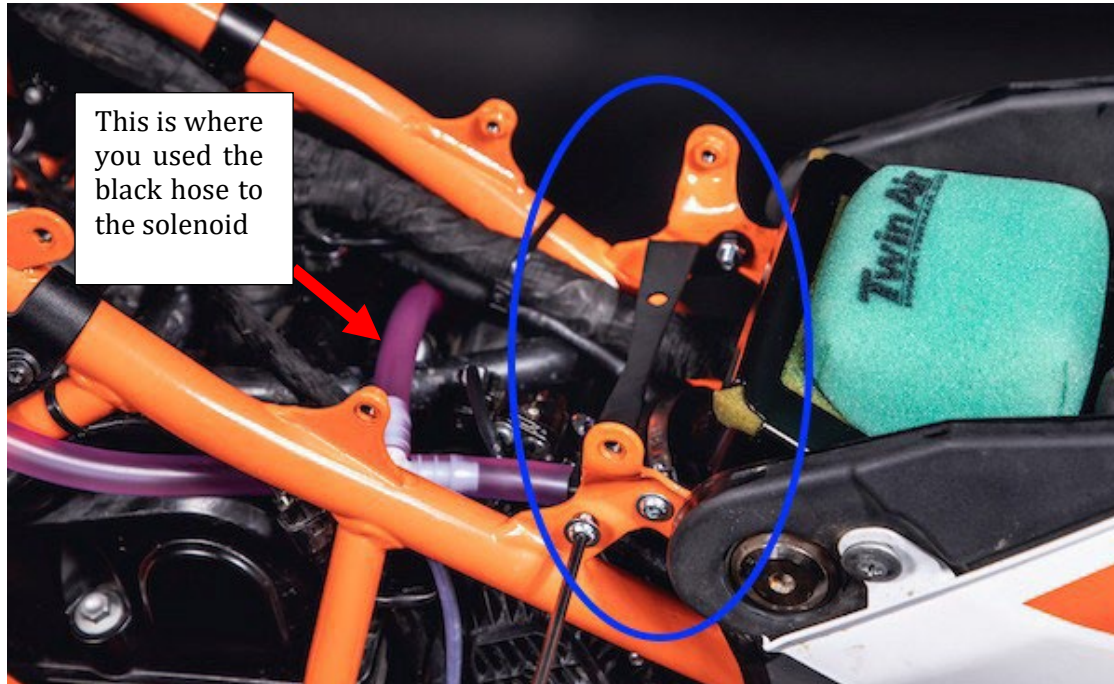

KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates

b/ Install the heat shield from ThermoTec on the tank. For easier installation you get the sticker in 2-3 pieces.



KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates

c/ Remove the OEM grommets and use the supplied threat inserts instead.



d/ Now place in the tank. Before you start make sure you lined correctly the fuel line to the ride side of the bike... (see picture below – you want to avoid the fuel line being squeezed)


In front the tank sits on the diagonal frame tube and in the back on the mounted bracket.



KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates

e/ To secure the tank, prepare the Velcro strap. Wrap it around the frame, go over the tank, under the frame on the other side and press the tank down to the frame and bracket, secure the Velcro.

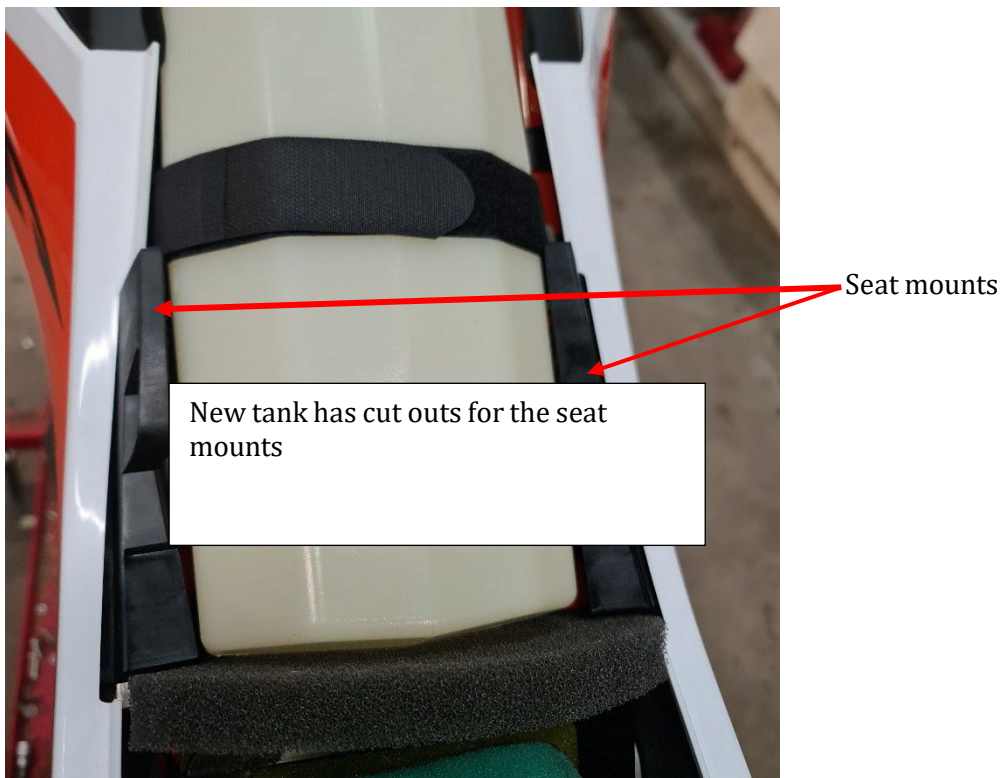

f/ Mount the carbon cover with M5x40 bolts

KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates



Connect fuel cap breather to rear tank breather follow directions for breather installation.

KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates


5/ Connect the tanks

a/ Remove the mudguard only. The wheel can stay.



b/ Take out the OEM fuel pump. **NOTE:** be careful when taking it out, because it hangs on many cables and you don't want to damage them. Also a small amount of gas may spill out, have a rag ready.

When you get it out, use small screw driver to unlock the plastic cover.

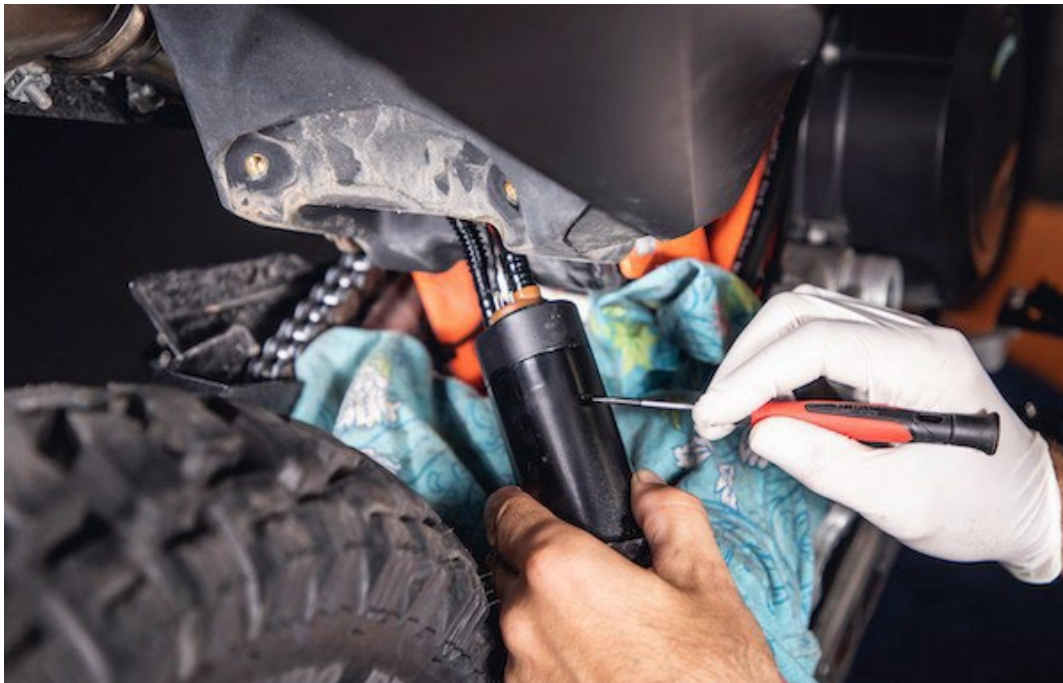


KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates

c/ Against the spacer outflow drill a hole diameter 4-5mm#1. Drill a second hole in the fuel pump cover 5mm above top edge of fuel transfer adapter in the forward facing edge. Before you insert the spacer put the fuel tube on the banjo. It is easier to do when removed. But do NOT tighten the banjo bolt yet!




d/ Bolt on the spacer with supplied bolts. Be careful to don't destroy the threads in your tank. When it is done, put back the mud guard.

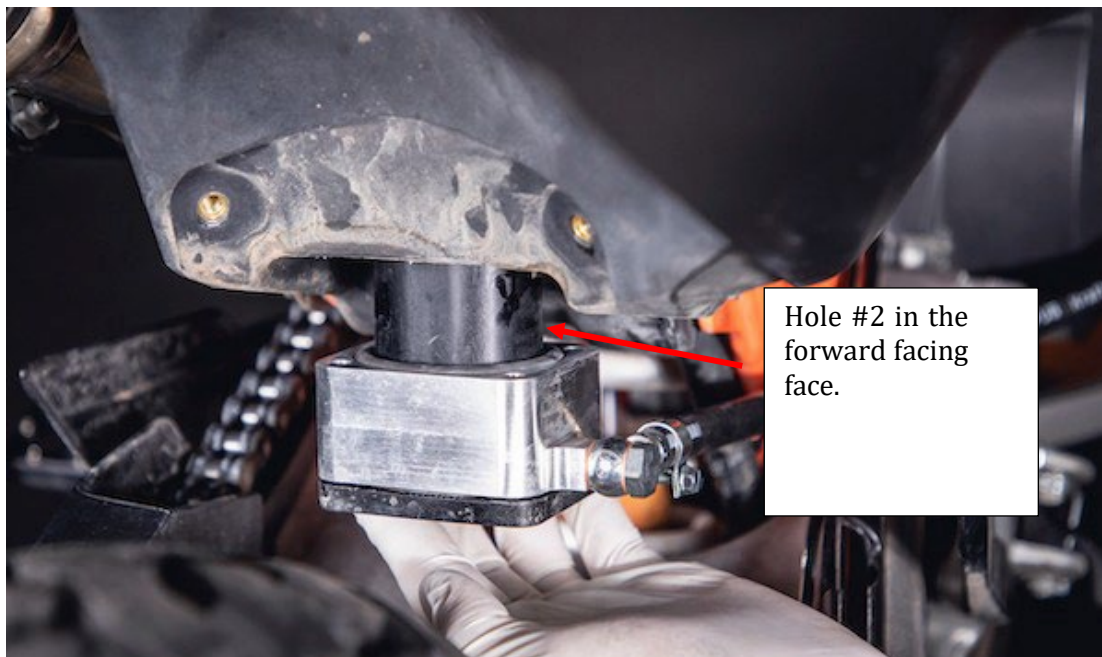


KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates

e/ Use supplied bolt and spacer to mount the fuel on/off valve.

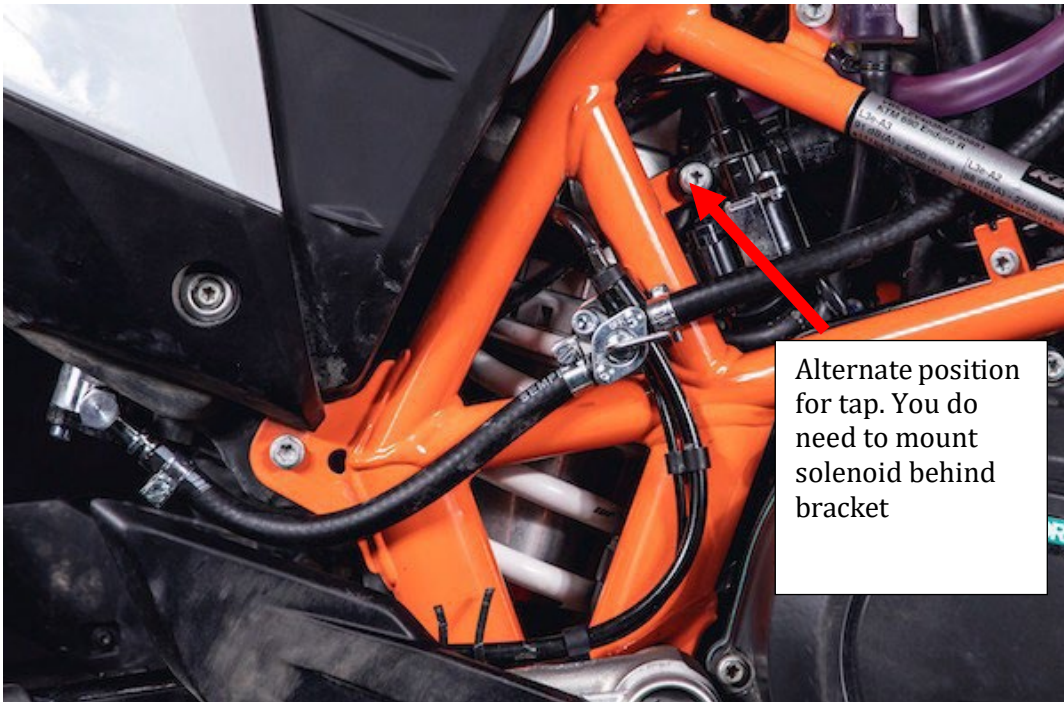

Alternate position for tap. You do need to mount solenoid behind bracket

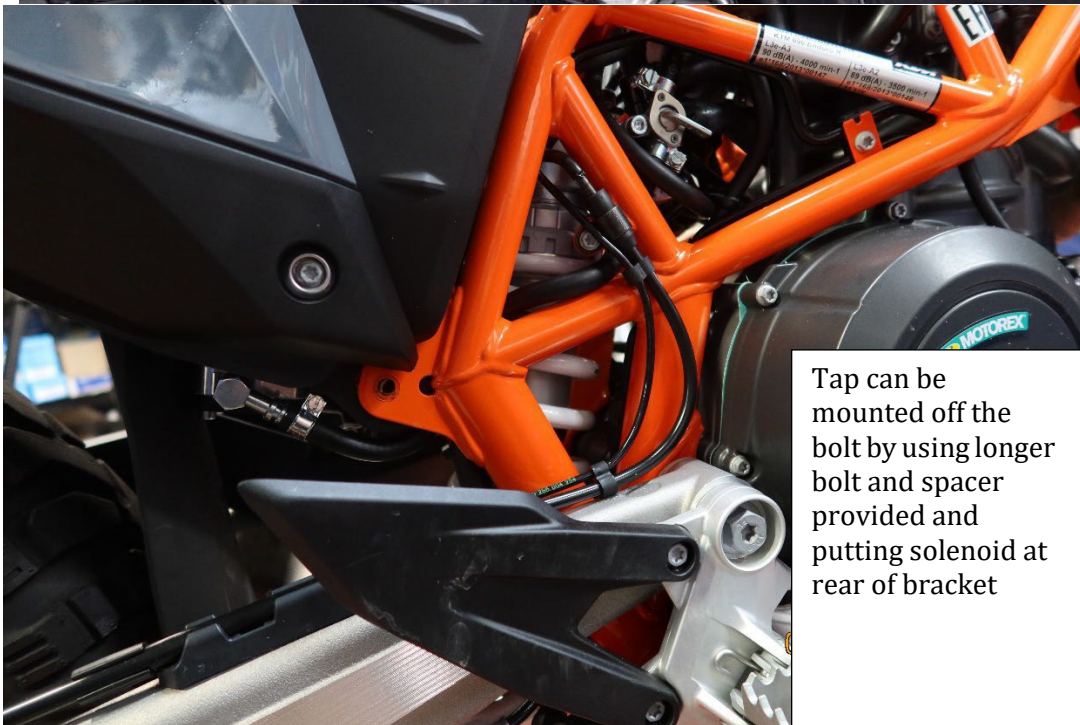

Tap can be mounted off the bolt by using longer bolt and spacer provided and putting solenoid at rear of bracket

f/ Now you can tight the banjo bolt.

KTM690 2019+ and Husqvarna 701 all

Rade Garage auxiliary tank installation guide with ABC Updates



Alternate position for fuel tap . move solenoid to rear of bracket and mount tap on front