


Fitting instructions for bottom tank bolt upgrade 701 Husqvarna


Thankyou for purchasing our bottom tank bolt upgrade from Adventure Bike Components. Your new bottom tank bolt upgrade is designed and manufactured by us using stainless steel components give both strength and easy removal when required.

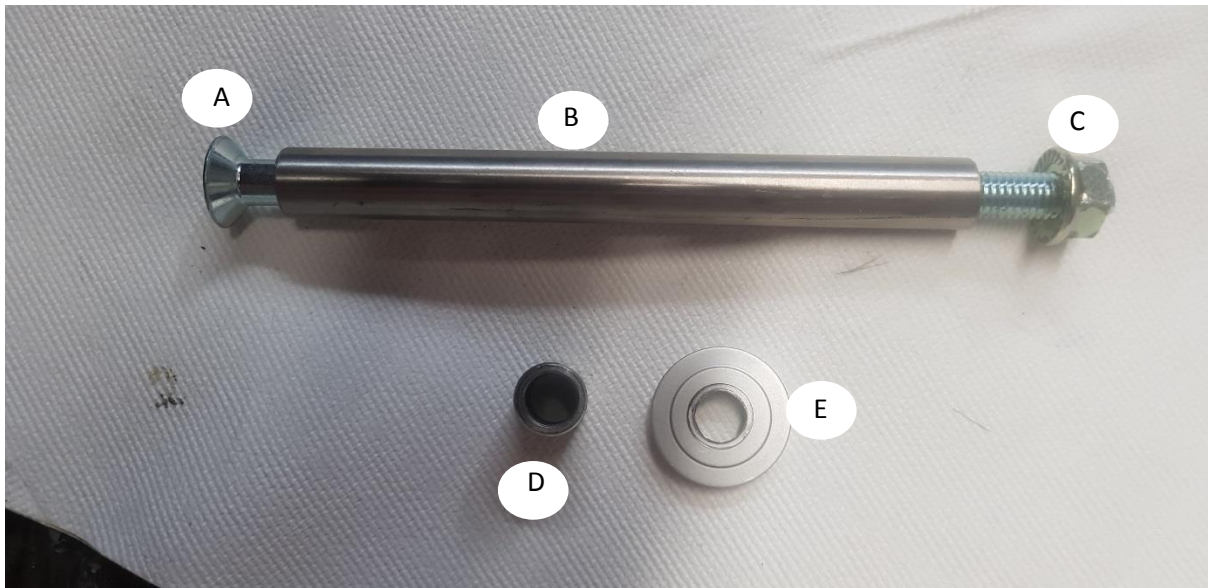

- A. Through bolt
- B. Replacement stainless steel insert
- C. Nut
- D. Exhaust mount spacer (reuse original)
- E. Washer exhaust side (reuse original)

Fitting instructions:

1. **IMPORTANT:** Ensure exhaust is cold when carrying out this procedure. The risk of injury is increases during installation if the exhaust is hot.
2. **WARNING:** This installation should only be attempted when exhaust temperature is at room temperature.
3. Remove components to allow access to bottom bolt

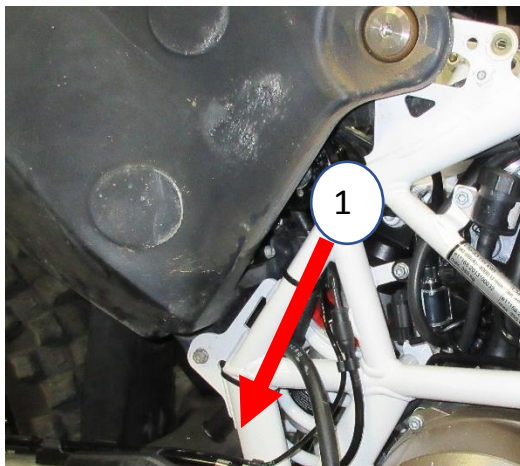

Fitting instructions for bottom tank bolt upgrade 701 Husqvarna

4.

Removing exhaust side bolt

- Insert a 5mm allen key into the centre of the thread where you removed the bolt. This will stop rotation and undo exhaust side mounting bolt.
- Lift tank away from mount and support.
- Screw a long bolt into original insert and push or pull out of rubber bushes this may take a tap with a hammer to start.



5. Slide new insert part B top picture into rubber mounts as pictured below

Fitting instructions for bottom tank bolt upgrade 701 Husqvarna



6. Refitting tank

- Drop tank back into position.
- Lubricate bolt.
- Ensure spacer is fitted into exhaust mount (part D).
- Fit washer to bolt (part E)
- Install bolt from exhaust side



7. Great work make sure you tighten (17.1 NM)