



Adventure Bike Components

KTM & Husqvarna Accessories



Fitting instructions for high pressure fuel pump regulator 701 Husqvarna

Thankyou for purchasing our high pressure fuel pump regulator




Fitting instructions:

1. **IMPORTANT:** Ensure exhaust is cold when carrying out this procedure. The risk of injury is increases during installation if the exhaust is hot.
2. **WARNING:** This installation should only be attempted when exhaust temperature is at room temperature.
3. **Drain all fuel from fuel tank before attempting this work**
4. Remove components to allow access to bottom bolt

Adventure Bike Components

KTM & Husqvarna Accessories

Fitting instructions for high pressure fuel pump regulator 701 Husqvarna

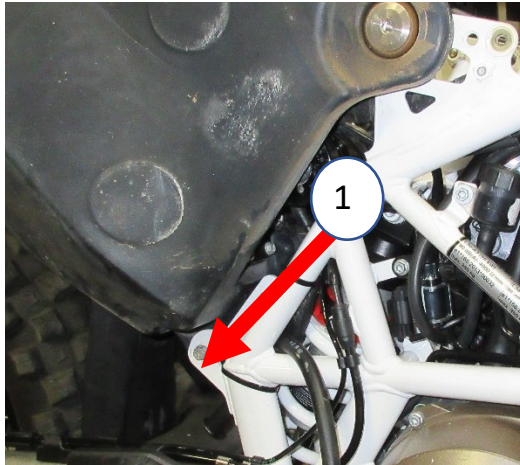

5.


Removing exhaust side bolt

- Insert a 5mm allen key into the centre of the thread where you removed the bolt. This will stop rotation and undo exhaust side mounting bolt.
- Lift tank away from mount and support

6.

Fuel pump pressure regulator is located behind 4 bolt plate RH side front of fuel tank

- Lift tank to access bolts on front plate

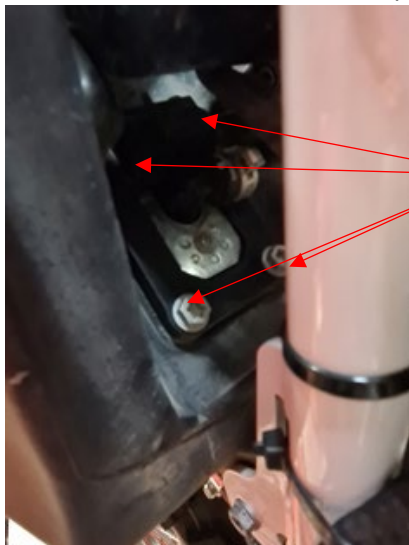


Bolts to be removed to access fuel pump regulator

Adventure Bike Components

KTM & Husqvarna Accessories

Fitting instructions for high pressure fuel pump regulator 701 Husqvarna

7.

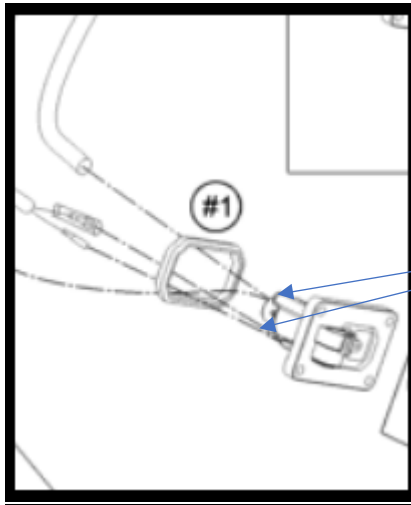

Fuel pump regulator is held in by 2 torque screws. Simply remove screws and flick out with a screw driver. Lube oring on new one and push into place then tighten screws

8. Refitting tank

- Drop tank back into position.
- Lubricate bolt.
- Install bolt from exhaust side
- Refill with fuel and check for any leaks

Disclaimer: check you laws concerning road registered vehicles and effects of modifying fuel systems prior to installing this component.