

Adventure Bike Components

KTM & Husqvarna Accessories

Fitting instructions for Smart Lambda Sensor Dongle **This Item is designed for Use off road or closed course**

Thankyou for purchasing our Smart Lambda Sensor Dongle


Fitting instructions:

1. IMPORTANT: Ensure exhaust is cold when carrying out this procedure. The risk of injury is increases during installation if the exhaust is hot.
2. WARNING: This installation should only be attempted when exhaust temperature is at room temperature.
3. Remove front LH radiator Shroud



4. Follow Cable from Lambda Sensor cable to the connecting plug

- Disconnect plug #1

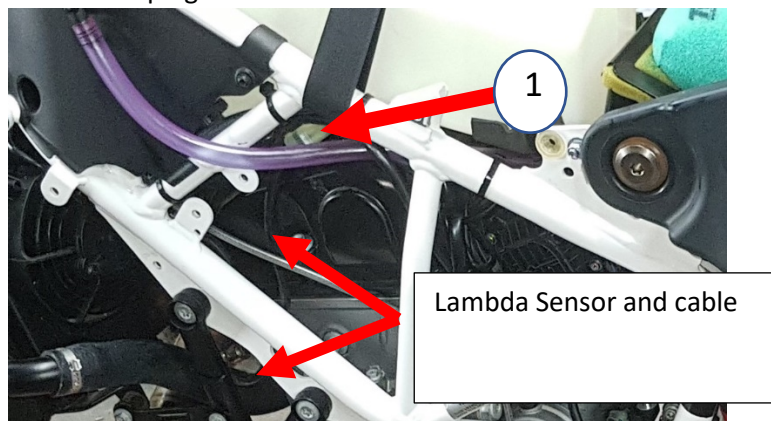


Adventure Bike Components

KTM & Husqvarna Accessories

Fitting instructions for Smart Lambda Sensor Dongle
This Item is designed for Use off road or closed course


5. Disconnect M-F connector

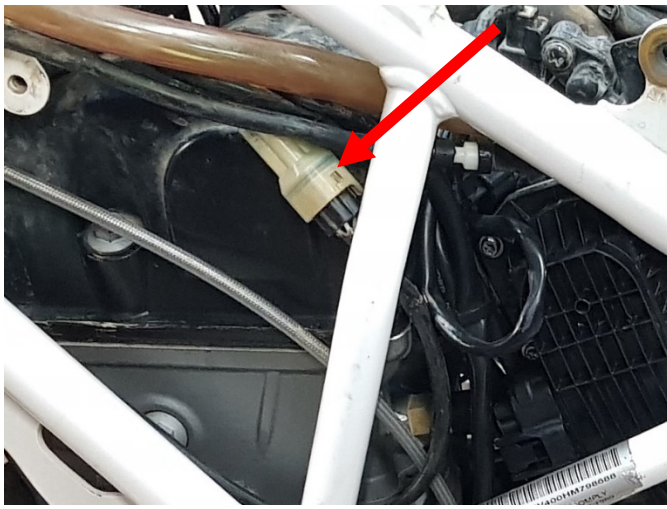

6.

Smart Labda Sensor Dongle

- Plug Lambda Sensor dongle male plug into Female on ECU cable and female Dongle plug into Lambda cable.
- So now dongle should be in line on your original cable
- Cable tie body of dongle to frame to prevent it rattling around

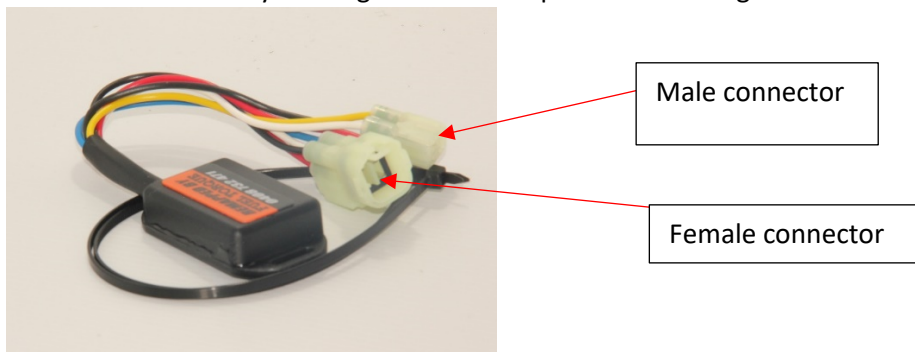

7. Refitting radiator shroud

- Enjoy the improved low end performance